


Panel saw WM45 plus



Saw Guard_Type A(Optional)

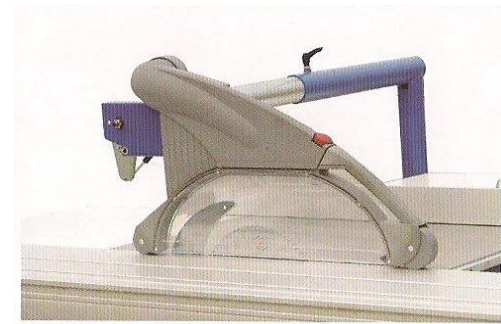

Sliding Table with Round Outlook(Optional)




Saw Guard_Type R(Optional)



Digital Readout on Rip Fence(Optional)



Digital Readout on Crosscut fence(Optional)

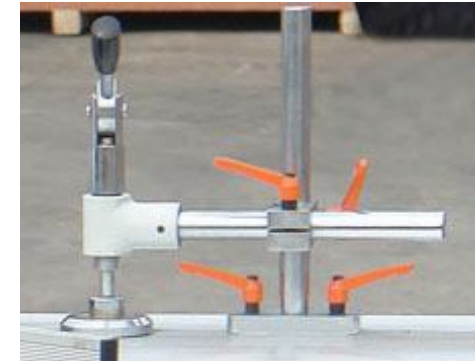

Hold-down Device(Optional)

WinMax Global Enterprise Ltd.

Tel:+86-757-81811612 Fax:+86-757-81811621

E-mail:sales@working-machinery.com Website:www.working-machinery.com

7th Floor, East Buiding, No.13, Dade Road, Nanhai, Foshan City, Guangdong Province, China

Main technical parameter

Dimension of sliding table	3200 × 360mm
Gross cut capacity	3200mm
Width of cut between saw blade and rip fence	1250mm
Saw blade diameter	300mm(∅ 250- ∅ 400)
Height of cut ∅ 300mm	80mm
Diameter of guide shaft spindle	∅ 50mm
Height of cut with saw blade 300mm at 45°	55mm
Speed of main saw spindle	3000/4600/5600rpm
Spindle diameter	30mm
Tilting saw blade	0-45°
Main motor	4kw/5.5kw
Scoring saw blade diameter	120mm
Speed of scoring saw blade	8000r/min
Scoring spindle diameter	20mm
Scoring motor	0.75kw
Net weight	640kg
Gross weight (with wooden package)	790kg
Overall dimensions	3250 × 3250 × 900mm



Optional part



Guide shaft spindle: ∅ 50
Full size addition table
Lubrication pump
Support feeding frame
2 nd generation front control panel hood
Type-R protection hood(Optional part)
Advanced LED readout
Main motor 5.5KW
Scoring motor 0.75KW
Steel Pressure kit
Manual tilting 45°
Max saw blade 400mm
Double scoring saw blade
Cylindrical direct guide up/down structure
Turbo gear tilting structure